

INSTALLATION INSTRUCTIONS

120V 60Hz

V I N C I
L I G H T I N G

SAFETY PRECAUTIONS:

Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in potentially fatal electric shock and/or property damage.

It is recommended that all wiring be performed by a qualified electrician. This fixture must be wired in accordance with all national and local electrical codes.

Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.

Make sure that the power source conforms to the requirements of the fixture (see labels on fixture housing).

To reduce the risk of electrical shock, and to assure proper operation, this fixture must be adequately grounded. To accomplish proper grounding, there must be a separate ground wire (green) or bare metal contact (metal conduit) between this fixture and the ground connection of your main power supply panel.

INSTALLATION INSTRUCTIONS

Step 1 – Preparing for installation

A. Disconnect electrical power before installing or servicing any part of this fixture.

B. Remove fixture from carton; remove components from hardware kit.

C. Separate the diffuser (3) from the pan (1) by rotating counterclockwise to unlock it from the 3 pins then lift away from the pan.

Wiring – All wiring must take place inside junction box (not included)

Caution: Make sure power is off at fuse or circuit breaker box. Check power wires for damage or scrapes. If the power supply wires are within three inches of the fixture, use a wire suitable for at least 90°C (194°F). Note: Most dwellings built before 1985 have supply wire rated to 60°C. Consult a qualified electrician ensure correct branch circuit conductor before installing.

Step 2 – Wiring fixture

A. Make all wire connections to appropriate wire. Secure with wire nuts (provided).

B. Connect the green wire from the fixture to the supply power source ground wire.

C. For none dimming. Connect the white wire from the fixture to the white (N) wire from supply power source.

Connect the black wire from the fixture to the black (L) wire from supply power source.

D. Do not mix wires. Pull on each wire lead to make sure connections are secure. Make certain no bare wires are exposed outside of wire connectors. Tuck all connections neatly into junction box.

Step 3 – Mounting

A. Install pan (1) to the ceiling by aligning keyhole slots to the junction box (not included) then using two screws (2) to secure it.


Step 4 – Color Changing Temperature Adjustment, CCT (if desired)

A. Adjust CCT switch accordingly to the desired color temperature as seen below. Note: Fixture is preset to 3000K from factory.

Step 5 – Install diffuser

A. Install diffuser (3) to the pan (1) by aligning any 3 notches on the diffuser to the corresponding pins on the pan and push up until flush then slightly rotating the diffuser clockwise until snug. Note: the diffuser is supported by the 3 pins on the pan.

Step 6 – Power to the fixture can now be restored

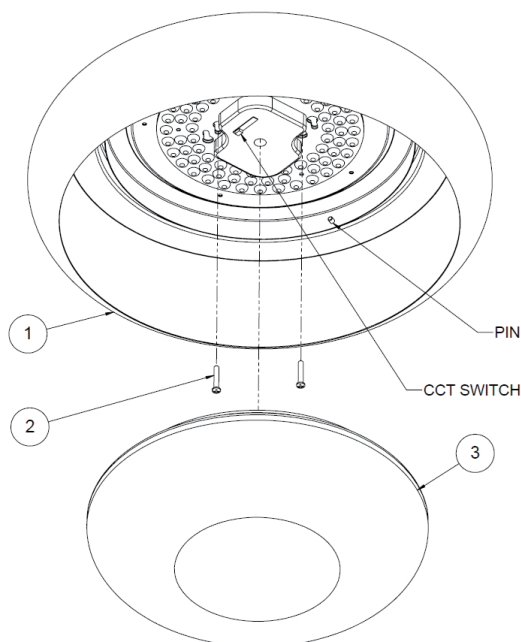

View shown for reference only. Individual models may vary.

RSM01150-R1